


Vacuum Wand Accessories

Stands

For use in vertical position

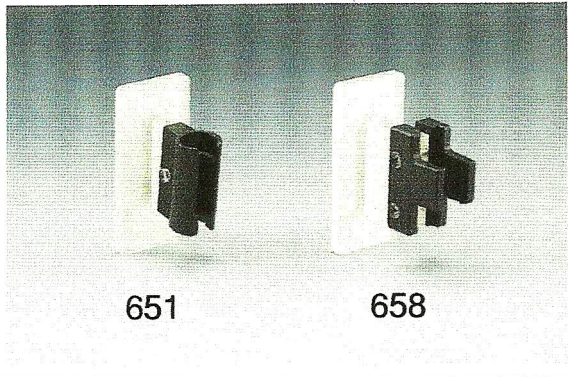


651

658

To be mounted on the wall with adhesive tape/ screws


For use in horizontal position

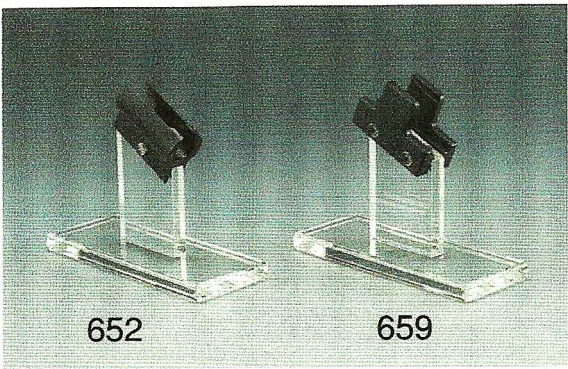

652

659


Model	Material	Compatible Body
651	Conductive nylon + Acrylic resin	NC/NO+SW
652		NC/NO+SW
658 *		NO
659 *		NO

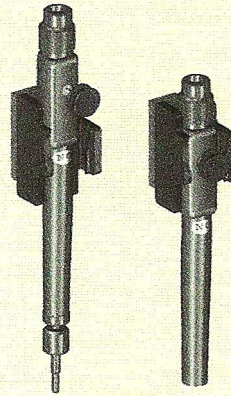

658 - 659


* Vacuum turns on when removed from the stand and shuts off when returned

ESD Safe Tubing

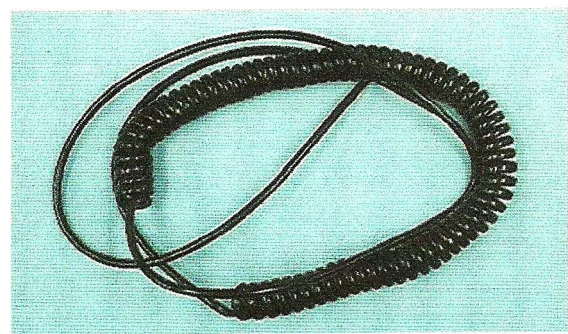

- No accumulation of static electricity
- Prevents sparks
- Made of Conductive Polyurethane ester
- Surface Resistivity: 10^3 to 10^6 ohms/cm²
- Volume Resistivity: 10 to 10^4 ohms-cm
- Usable Temperature Range: -40C to +80C

Model	Size (mm)					Weight (g)
	D1	D2	L1	L2	L3	
851-L	6	4	400	500	1000	118
851-M	5	3	400	500	1000	84

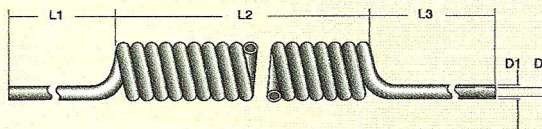

Available in straight version: 850-L/M